

# ShareTalk

## *User's Manual*

*EA-500T*      (*10BASE-T Only*)  
*EA-500*        (*10BASE-T & 10BASE-2*)

**NETWORKING THE FUTURE**


## Features

- Built-in RJ-11 port for easy connectivity to AppleTalk via PhoneNet, FastNet or similar device.
- 10BASE-T Ethernet port to access Macs and other Ethernet devices on the Ethernet network.
- Support 8 (or 12 maximum) Printers or Macs on the LocalTalk network.
- Easy Setup, does not require installing software.
- Easy firmware update for future enhancement.

## Connecting the ShareTalk to Macs without a hub.

Three easy steps to set up your ShareTalk Network:


1. Connect the LocalTalk cable from the FastNet/PhoneNet connector to ShareTalk.
2. Attach the Power Adapter to the ShareTalk.
3. Connect one end of a 10BASE-T Ethernet **Cross-over** cable to the Ethernet port on the ShareTalk and connect the other end of the cable to Ethernet port on a Mac.

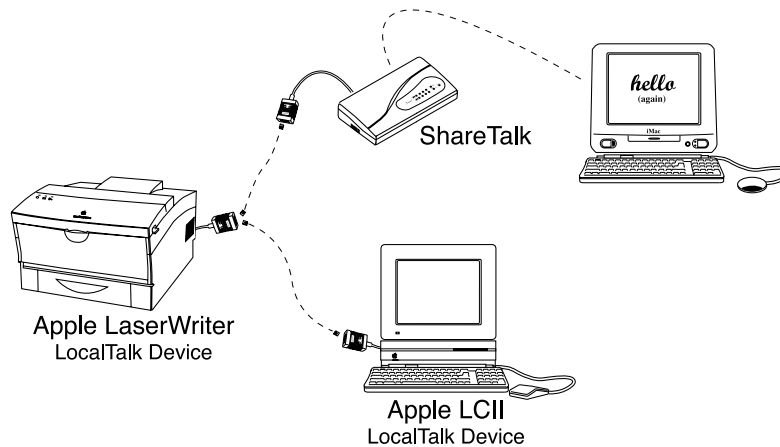

## Connecting the ShareTalk to Macs through a hub.

Three easy steps to set up your ShareTalk Network:


1. Connect the LocalTalk cable from the FastNet/PhoneNet connector to ShareTalk.
2. Attach the Power Adapter to the ShareTalk.
3. Connect one end of a 10BASE-T Ethernet **Straight-through** cable to the Ethernet port on the ShareTalk and connect the other end of the cable to Ethernet port on a hub.

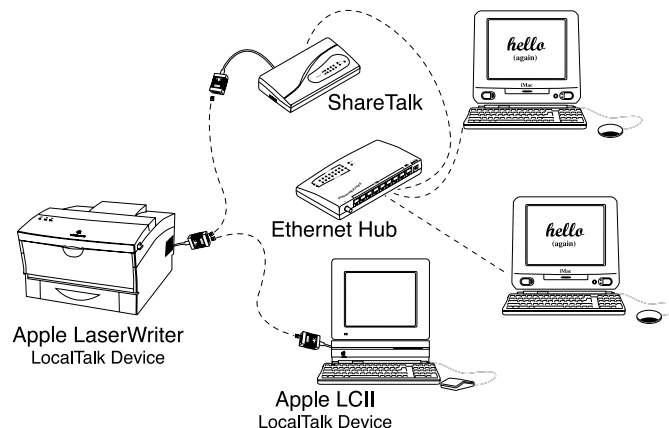

## Attention

- Only one ShareTalk per LocalTalk network is permitted. Installing other similar devices in the same LocalTalk network will cause **entire LocalTalk network to behave erratically or cease to function**.
- ShareTalk **does not** support printers without LocalTalk ability, e.g. Apple StyleWriter.
- There is **no limitation** of the **ShareTalk** or other similar devices on an **Ethernet network**.

# Panels and LED Display

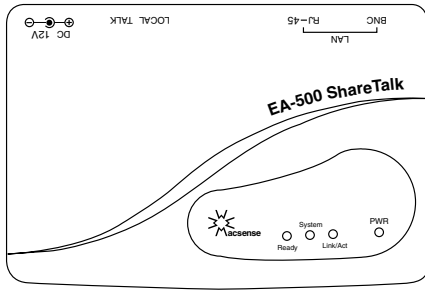

Front Panel



Rear Panel

## LED Display

Power:	On	Power On
Link/Act:	On	Link Established
	Blinking	Data Transmitting/Receiving
System:	Blinking/Off	System On
	Ready:	On Ready

## Specifications

Port:	1 x 10BASE-T Uplink RJ-45 port 1 x 10BASE-2 BNC port (EA-500 only) 1 x LocalTalk Mini-din 8 port
Power Consumption:	12V / 500mA
Temperature:	
Operation	0°C~40°C (32°F~104°F)
Storage	-25°C~70°C (-13°F~158°F)
Humidity:	5%~95% (Non-condensing)
Net Weight:	175 gram 6.17 oz